


Telha Trapezoidal GR-25



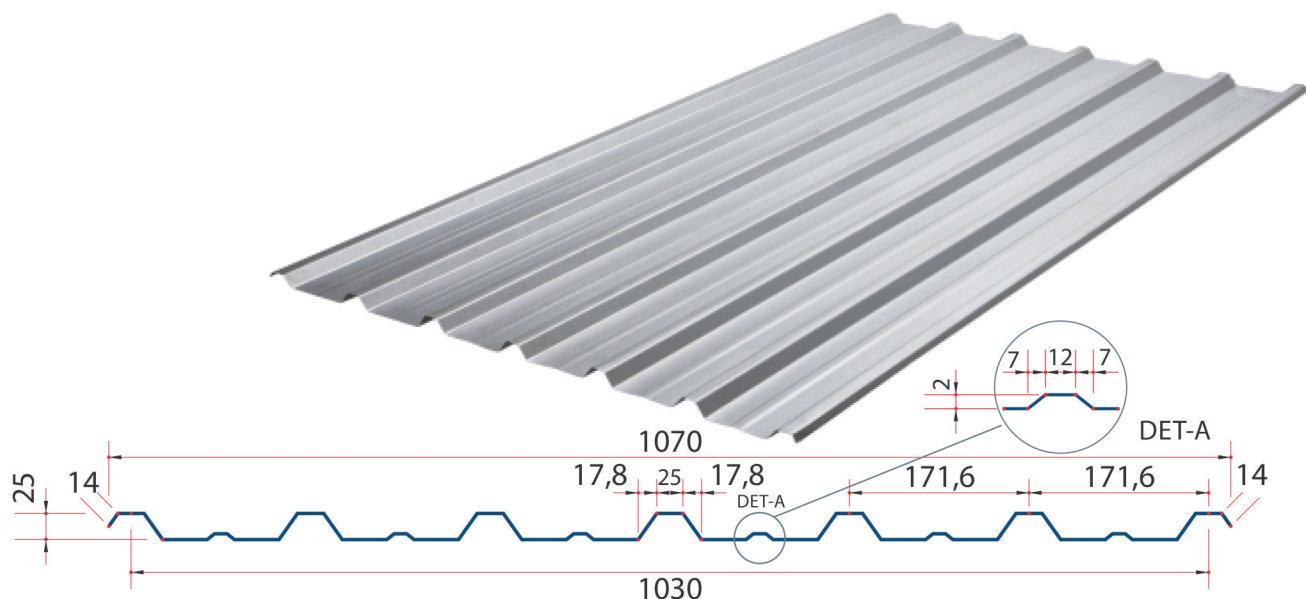

Sobrecargas admissíveis para telhas de aço (kgf/m^2) GR-25
Flecha L/180

Telha GR 25 (2 apoios)		q (kgf/m^2)				
Vão (m)		0,43	0,5	0,65	0,8	0,95
1,00		233	269	345	419	491
1,25		149	172	221	268	315
1,50		104	120	154	186	218
1,75		75	87	111	135	158
2,00		50	58	74	90	106
2,25		35	41	52	64	74
2,50		26	30	38	46	54
2,75		19	22	29	35	41
3,00		15	17	22	27	31

Telha GR 25 (3 apoios)		q (kgf/m^2)				
Vão (m)		0,43	0,5	0,65	0,8	0,95
1,00		233	269	345	419	491
1,25		149	172	221	268	315
1,50		104	120	154	186	218
1,75		76	88	113	137	161
2,00		58	67	86	107	122
2,25		46	53	68	83	97
2,50		37	43	55	67	79
2,75		31	36	46	55	65
3,00		26	30	38	47	55

Telha GR 25 (4 apoios)		q (kgf/m^2)				
Vão (m)		0,43	0,5	0,65	0,8	0,95
1,00		292	336	432	523	614
1,25		187	215	277	335	393
1,50		130	149	192	232	273
1,75		95	110	141	171	201
2,00		73	84	108	131	154
2,25		58	66	85	103	127
2,50		47	54	69	83	98
2,75		36	42	54	66	77
3,00		28	32	42	51	59

Valores típicos de pesos GR-25		Peso próprio e peso m^2 útil				
		Espessura (mm)				
		0,43	0,50	0,65	0,80	0,95
kgf/m		4,07	4,72	6,12	7,54	8,95
kgf/m ²		3,95	4,58	5,94	7,32	8,69

Valores típicos de pesos GRG-25		Peso próprio e peso m^2 útil				
		Espessura (mm)				
		0,43	0,50	0,65	0,80	0,95
kgf/m		3,86	4,52	5,94	7,36	8,77
kgf/m ²		3,75	4,39	5,77	7,15	8,52

Recobrimento Transversal



Recobrimento Longitudinal

