



Telha Trapezoidal GR-40

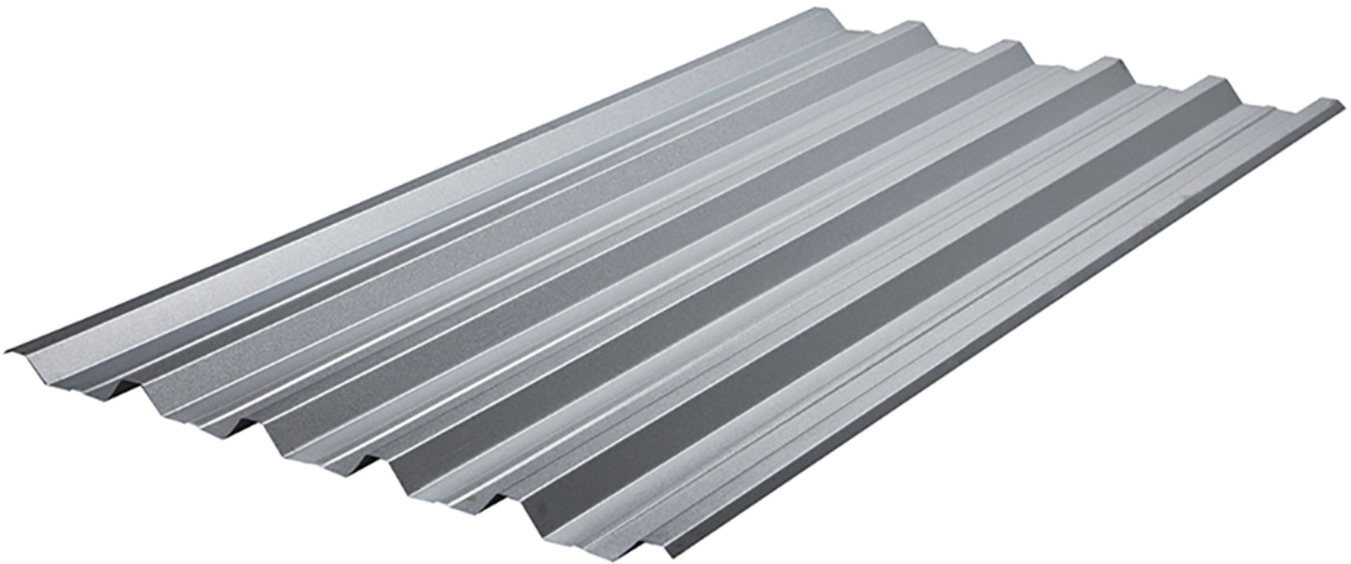

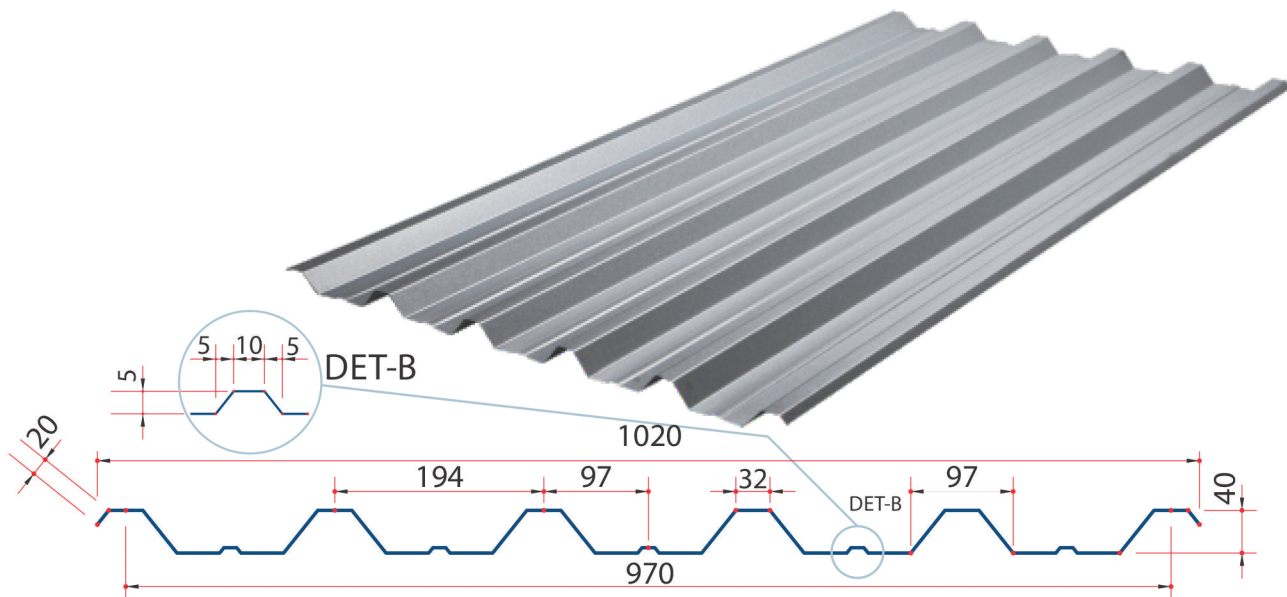

Sobrecargas admissíveis para telhas de aço (kgf/m²) GR-40
Flecha L/180


Telha GR 40 (2 apoios)		q (kgf/m ²)				
Vão (m)		0,43	0,5	0,65	0,8	0,95
1,25		289	334	431	525	618
1,50		200	232	299	365	429
1,75		147	170	220	268	315
2,00		112	130	168	205	241
2,25		89	103	133	162	191
2,50		71	83	107	131	154
2,75		54	62	80	98	115
3,00		41	48	62	75	89
3,25		33	38	49	59	70
3,50		26	30	39	47	56
3,75		21	25	31	39	45

Telha GR 40 (3 apoios)		q (kgf/m ²)				
Vão (m)		0,43	0,5	0,65	0,8	0,95
1,25		289	334	431	525	618
1,50		200	232	299	365	429
1,75		147	170	220	268	315
2,00		113	130	168	205	241
2,25		89	103	133	162	191
2,50		72	83	107	131	154
2,75		59	69	89	108	127
3,00		50	58	75	91	107
3,25		43	49	64	78	91
3,50		36	43	55	67	79
3,75		32	37	48	58	69


Telha GR 40 (4 apoios)		q (kgf/m ²)				
Vão (m)		0,43	0,5	0,65	0,8	0,95
1,25		360	418	539	656	773
1,50		251	290	374	456	537
1,75		185	213	275	268	394
2,00		141	163	210	335	302
2,25		111	129	166	257	238
2,50		90	104	135	203	193
2,75		75	86	111	164	159
3,00		63	73	94	114	134
3,25		53	62	80	97	114
3,50		46	53	69	84	99
3,75		40	46	60	73	86

Valores típicos de pesos GR-40					
Peso próprio e peso m ² útil					
	Espessura (mm)				
	0,43	0,50	0,65	0,80	0,95
kgf/m	4,07	4,72	6,12	7,54	8,95
kaf/m ²	4,20	4,87	6,31	7,77	9,23

Valores típicos de pesos GRG-40					
Peso próprio e peso m² útil					
	Espessura (mm)				
	0,43	0,50	0,65	0,80	0,95
kgf/m	3,86	4,52	5,94	7,36	8,77
kaf/m²	3,98	4,66	6,12	7,59	9,04



Recobrimento Transversal
Largura útil 970

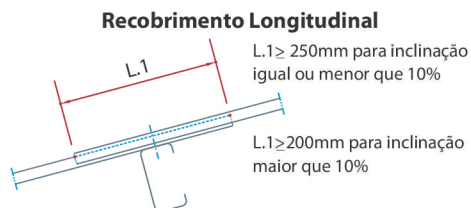

Recobrimento Longitudinal

